

Pathfinder

interactive kiosk



Robust, adaptable and highly configurable Pathfinder meets the challenge for applications in vandal prone harsh environments.

Highly modular and configurable: Its range of options, including sitting/standing configuration, varying screens and desktops, enable the client to tailor the kiosk to suit their requirements.


Cluster configurations: Designed to be space efficient, these units easily fit together to enable maximisation of space and grouping of applications.

Space-efficient: Delivers considerable levels of functionality and configurations where space is a premium.

PC-Based: Offers the option of including a range of PCs.

Upgradeable and serviceable: Options can be easily added and removed as necessary, making it not only easy to service in situ but also providing an upgrade path for any business, reducing upgrade costs.

Supports wide range of applications: Information, transactional, promotions, HR, Job Search and careers/recruitment.

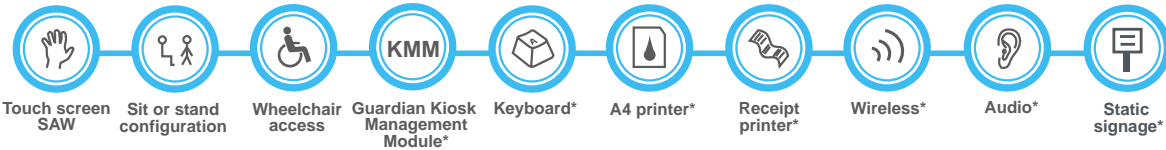



*Options, at extra cost.

Pathfinder

Technical Specifications



Operating Environment	Temperature	10-35°C (primarily limited by the kiosk processor)
	Humidity	20-80% Non-Condensing
	Ventilation	Natural Convection Cooling
Mains Input	Standard	220-240VAC ±10% 50Hz
	Power	300W average (500W max.) excluding internal power outlet
	Internal Auxiliary DC Supply Rails	Auxiliary DC Supply Rails (for peripheral equipment): 5V, 12V & 24V
LCD Monitor	Screen Size	15" Angle: 75° (from horizontal)
	Viewing Angle	60°/60°/50°/50° (L/R/T/B)
	Contrast Ratio	300:1
Keyboard & Trackball	Limited Key Ruggedised Keyboard	
	Tactile Buttons	
	Stainless Steel Trackball	
Dimensions	Height	1170mm (Sit) 1350mm (Stand)
	Width	705mm (Sit) 690mm (Stand)
	Depth	800mm (Sit) 640mm (Stand)
	Weight	104kg (110kg with transport packaging) (Sit) 105kg (111kg with transport packaging) (Stand)
Guardian Kiosk Management Module**	Printer Monitoring: Paper Low / Out / Jam	
	CPU / Application Heartbeat Monitoring	
	Door Sensor / Auxiliary Device Monitoring	
Options*	Guardian Kiosk Management Module* / High Quality SAW 15" Touchscreen / 110V Switchable PSU* / A4/receipt Thermal Printer* / Slim or Desktop Form Factor PC* / Motorised Magnetic / Smart Card Reader* / High Quality Audio System* / Stereo Headphones Port*	
Applications	Information, Promotions, Form completion, HR Applications, Transactional & Job Search	

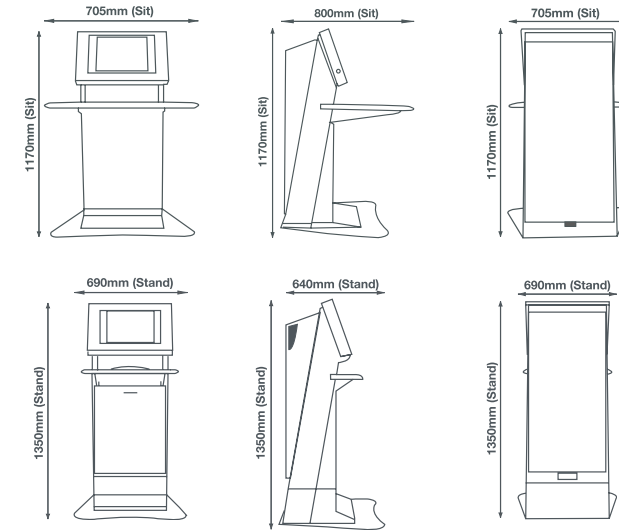

United Kingdom

NeoProducts (UK) Limited
69 Melchett Road,
Kings Norton Business Centre,
Birmingham, B30 3HP, UK
Tel. +44 (0)121 486 4300
Fax. +44 (0)121 486 4334
Email. neo@neoproducts.co.uk

Australia

NeoProducts Pty Ltd
47 Overseas Drive, Noble Park,
Victoria, 3174, Australia
Tel. +61 (0)3 9701 1511
Fax. +61 (0)3 9701 1799
Email. neo@neoproducts.com.au

www.neoproductsgroup.com

interactive communication

* Options available on Kiosk, at extra cost.

** The application and/or browser running on the Kiosk must support the Guardian. For further details contact NeoProducts.