




Zenon

multi-function kiosk

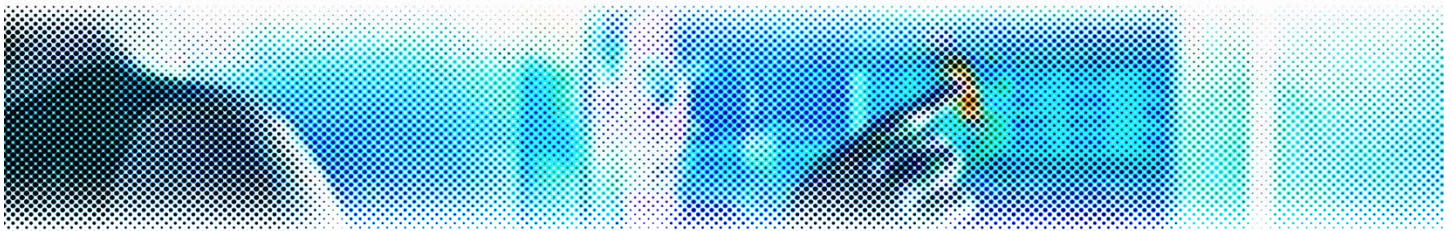

Impressive range of presentation and peripheral options

The NeoProducts **Zenon** is a highly configurable information kiosk designed with space consciousness in mind. The **Zenon** is designed for maximum flexibility in configuration and is therefore easily adaptable to suit many applications and self-service environments.

Users can interact with the kiosk by using the touch screen and a range of internal devices or peripherals. It has been designed to meet the requirements of today's environment.

Easily Serviceable

Designed to offer ease of serviceability, the **Zenon's** modular construction allows easy on-site component replacement with minimal disruption. As with all Neo kiosks, the **Zenon** is designed to be easily serviced with front access door for access to the internal peripherals



Freestanding



Wall Mount



Counter top



Zenon

Technical Specifications

Enclosure

The enclosure is fully constructed of robust powder coated 1.5mm mild steel with easy and secure keyed front access for maintenance and replacement of consumables. Various colors and finishes are available including the application of client branding.

PC Specification*

*Subject to confirmation at time of order

Operating System:	Genuine Windows® XP Professional
Processor:	Core 2 Duo E8200 2.66Ghz-1333 Mhz
Chipset:	Intel® Q45 Chipset
HDD: Optical Drive:	160GB, DVD-ROM, DVD-Recordable
Memory:	1GB PC3-8500 (1066MHz) DDR3, SODIMM
Integrated Communications:	Intel® 82567DM, 10M/100M/1000M Gigabit Ethernet
Graphics Integrated:	Intel® GMA4500

LCD Monitor & Touchscreen

Screen Size	15", 17" and 19" LCD
Viewing Angle	145° x 145°
Brightness	280 cd/m ² (typical)
Contrast Ratio	700:1 (typical)
Touchscreen	3mm Capacitive or Sound Acoustic Wave (SAW)

Printers

80mm Thermal Printer	200 dpi Resolution Up to 100ms print speed Auto Cutter 80 mm (3") paper roll holder
----------------------	----------------------------------------------------------------------------------------------

Options*

Static signage panel	Bar code scanner
2 nd LCD Screen for digital signage	Mag Stripe Card Reader
Payment terminals (EFTPOS, Chip and Pin)	Other printer options and peripherals supplied to order.

Mains Input

Standard	90-240VAC +/- 10% 50Hz
Power	Up to 190W
Internal Auxiliary DC Supply	Auxiliary DC Supply Rails
Rails	5V, 12V & 24V

Operating Environment

Temperature	10 – 35°C (internal)
Humidity	20-80% Non-condensing
Ventilation	Fan assisted Natural Convection Cooling

Dimensions

Height 1400mm, / Width – 430mm / Depth – 430mm
Weight – 40kgs with transport packaging (30kgs unpacked)

**Options available at extra cost
Specifications are subject to change without notice

United Kingdom

NeoProducts (UK) Ltd
69 Melchett Road
Kings Norton Business Centre
Birmingham, B30 3HP, UK
Tel. +44 (0)121 486 4300
Fax. +44 (0)121 486 4334
Email. neo@neoproducts.co.uk
www.neoproductsgroup.com

Australia

NeoProducts Pty Ltd
47 Overseas Drive, Noble Park,
Victoria, 3174, Australia
Tel. +61 (0)3 9701 1511
Fax. +61 (0)3 9701 1799
Email. neo@neoproducts.com.au
www.neoproductsgroup.com